

TRILITE® MA-15OH

Uniform Particle Size Strong Base Anion Exchange Resin

Rev.2 Nov 2018

TRILITE® MA-15OH Strong Base Anion Exchange Resin is a Gel Type 1 Uniform Particle Size resin. Because of its excellent ion removal capacity, high purity water can be produced economically. TRILITE® MA-15OH has higher capacity than TRILITE® MA-15OH. Because of its uniform particle size distribution, TRILITE® MA-15OH has characteristics of excellent rinse performance and outstanding mechanical and chemical stability, leading to low crush rate even after long-term use. TRILITE® MA-15OH can be supplied by OH⁻ form but Cl⁻ form can be available depending on application and user's request.

Physical and Chemical Properties

Physical Form	Beige translucent spherical beads	Matrix	Styrene-DVB, Gel
Functional Group	Type 1 (Quarternary amine)	Ionic Form	OH ⁻
Total Capacity(eq/ℓ)	1.20 ↑	Moisture Retention(%)	54~62
Shipping Density(g/ℓ)	670	Particle Density	1.08
Uniformity Coefficient	1.1 ↓	Particle Size(μm)	630±50
Whole Beads(%)	95 ↑	Swelling (Cl ⁻ →OH ⁻ , %)	22

Recommended Operating Conditions

Operating Temp(°C)	90(Cl ⁻), 70(OH ⁻)	pH Range	0~14
Bed Depth(mm)	800	Service Flow Rate(m/h)	10~60
Regeneration			
Regenerant	NaOH	Concentration(%)	2~8
Level(g/ℓ)	50~200	Flow Rate(m/h)	2~8
Rinse Requirement(BV)	2~10		

Applications

TRILITE® MA-15OH can be used for many applications like demineralization and other special processes. Especially, TRILITE® MA-15OH can also be used for various systems like packed bed and mixed bed units including CPP(Condensate Polishing Plant).

Hydraulic Characteristics

Figure 1 and 2 show the backwash expansion of TRILITE® MA-15 as a function of flow rate and temperature.

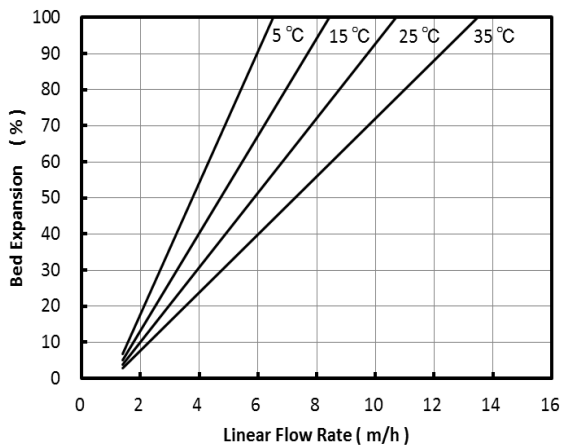


Figure 1. TRILITE® MA-15 Cl⁻ Type

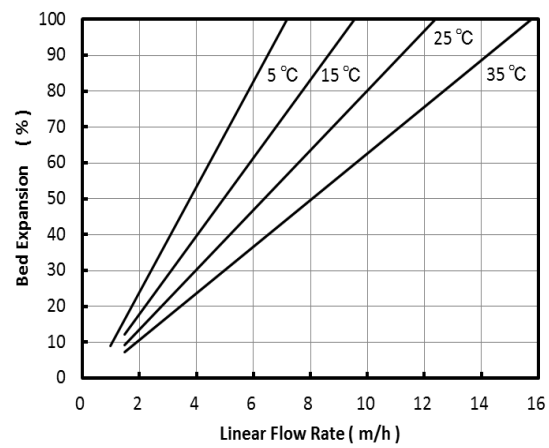


Figure 2. TRILITE® MA-15 OH⁻ Type

Figure 3 and 4 show the pressure drop of TRILITE® MA-15 as a function of flow rate and water temperature.

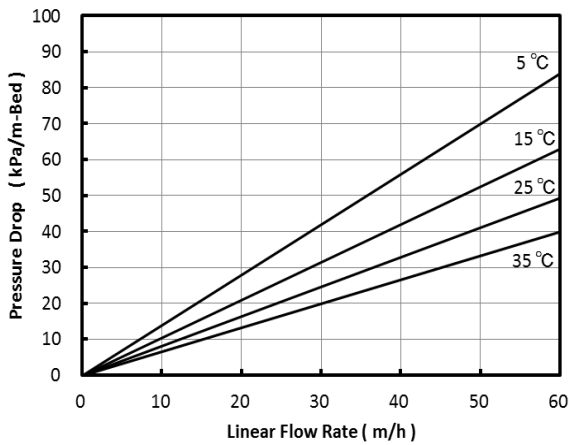


Figure 3. TRILITE® MA-15 Cl⁻ Type

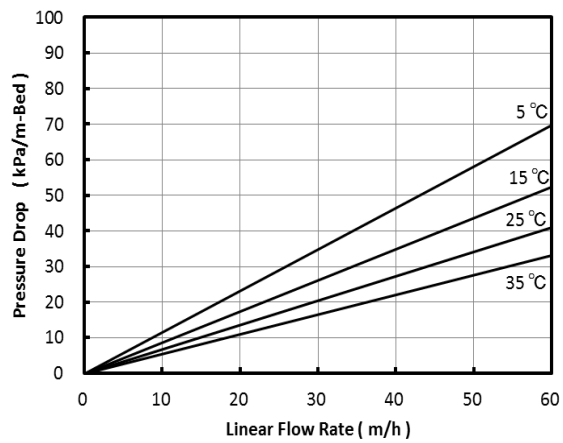


Figure 4. TRILITE® MA-15 OH⁻ Type

All information contained in brochure is not absolute rather than relative one, created under the controlled environment by Samyang Corporation. Therefore, Samyang Corporation has no legal responsibility with respect to any and all information provided in brochure.

Samyang's TRILITE Ion exchange resins are produced based on the ISO 9001, ISO 14001 certification.
 Samyang Corporation, 31 Jong-ro 33-gil, Jongno-gu, Seoul, Korea Tel: (02)740-7732~7, Fax: (02)740-7140



<http://samyangtrilite.com>