

TRILITE® MC-04NH

Uniform Particle Size Strong Acid Cation Exchange Resin

Rev.2 Nov 2018

TRILITE® MC-04NH Strong Acid Cation Exchange Resin is a Gel Type Uniform Particle Size resin. TRILITE® MC-04NH is a low cross-linkage product and specifically treated and improved for catalytic applications. It has outstanding mechanical and chemical stability. TRILITE® MC-04NH is supplied by H⁺ form.

Physical and Chemical Properties

Physical Form	Khaki translucent spherical beads	Matrix	Styrene-DVB, Gel
Functional Group	Sulfonic acid	Ionic Form	H ⁺
Total Capacity(eq/ℓ)	1.20 ↑	Moisture Retention(%)	65~70
Shipping Density(g/ℓ)	840	Particle Density	1.13
Uniformity Coefficient	1.1 ↓	Particle Size(μm)	500±30
Whole Beads(%)	95 ↑	Swelling(Na ⁺ →H ⁺ , %)	9

Recommended Operating Conditions

Operating Temp(°C)	120	pH Range	0~14
Bed Depth(mm)	800	Service Flow Rate(m/h)	10~40
Regeneration			
Regenerant	HCl, H ₂ SO ₄	Concentration(%)	HCl(4~10), H ₂ SO ₄ (1~4)
Level(g/ℓ)	30~150	Flow Rate(m/h)	2~10
Rinse Requirement(BV)	2~10		

Applications

TRILITE® MC-04NH is specifically improved for catalytic application. i.e. refining of BPA.

Hydraulic Characteristics

Figure 1 shows the backwash expansion of TRILITE® MC-04NH as a function of flow rate and temperature.

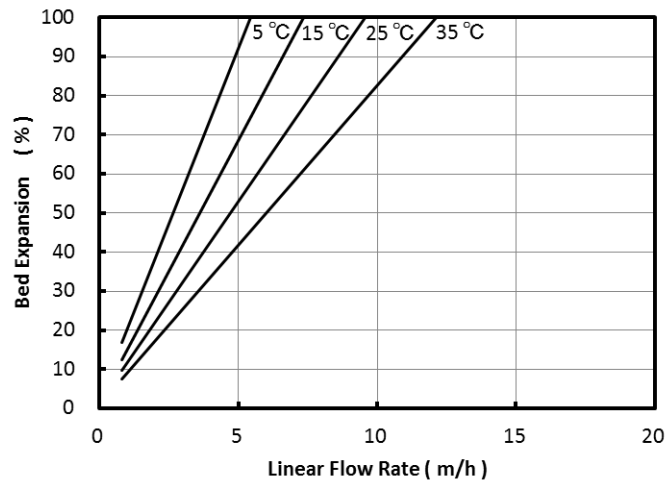


Figure 1. TRILITE® MC-04 NH⁺ Type

Figure 2 shows the pressure drop of TRILITE® MC-04NH as a function of flow rate and water temperature.

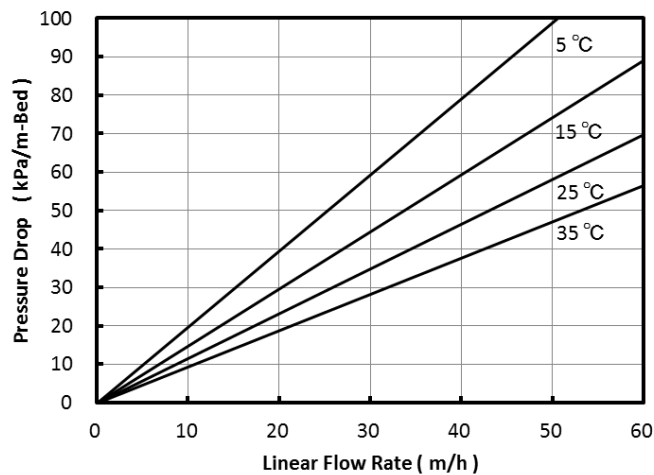


Figure 2. TRILITE® MC-04 NH⁺ Type

All information contained in brochure is not absolute rather than relative one, created under the controlled environment by Samyang Corporation. Therefore, Samyang Corporation has no legal responsibility with respect to any and all information provided in brochure.

Samyang's TRILITE Ion exchange resins are produced based on the ISO 9001, ISO 14001 certification.

Samyang Corporation, 31 Jong-ro 33-gil, Jongno-gu, Seoul, Korea Tel: (02)740-7732~7, Fax: (02)740-7140



<http://samyangtrilite.com>